


FPS-CMPP2JJJ

FDH 4000/5000, 1X8 splitter, SC/APC



- *CommScope intends to release this product at a future date. At such time, this product will comply with the requirements of the Build America, Buy America Act and/or applicable waivers. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Splitter module
Product Series	FDH 4000 FDH 5000 FPS
Government Requirements	Build America Buy America (BABA) coming soon*

General Specifications

Device Type	Plug-and-play module
Functionality	Splitting
Application	For use in FDH 4000 and 5000 cabinets
Circuits, quantity	1
Distribution Type	1 x 8 splitter
Interface, front	SC/APC
Interface, Input	SC/APC
Interface, Output	SC/APC
Location of Manufacturing	Coming soon
Module Color	Black
Split Ratio	Symmetrical
Splitter, quantity	1

Ordering Tree

FPS-CMPP2JJJ

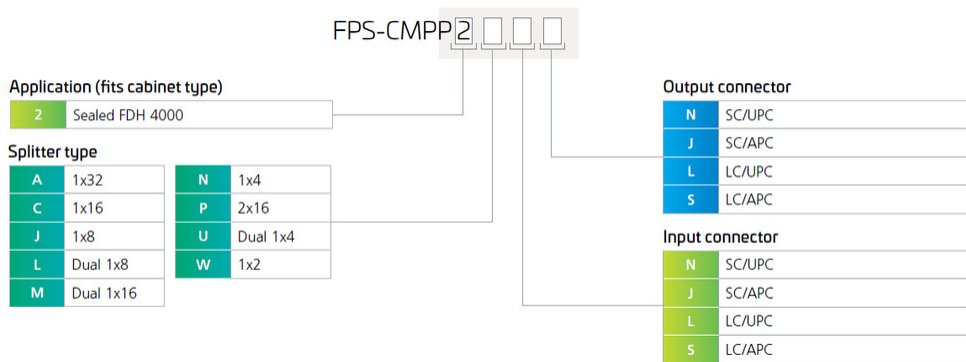

Optical Specifications

Directivity, minimum	60 dB
Polarization Dependent Loss, maximum	0.2 dB
Uniformity, maximum	1 dB
Wavelength Range	1260–1635 nm
Insertion Loss, Splitter, maximum	10.2 dB
Insertion Loss, Splitter, typical	9.7 dB
Return Loss, Splitter, minimum	55 dB

Packaging and Weights

Packaging quantity	1
---------------------------	---