


Fiber Patch Cable

SC/SC MM 50 MICRON PVC

PART NUMBER: F-0606-50-XM

Low Voltage

High Energy

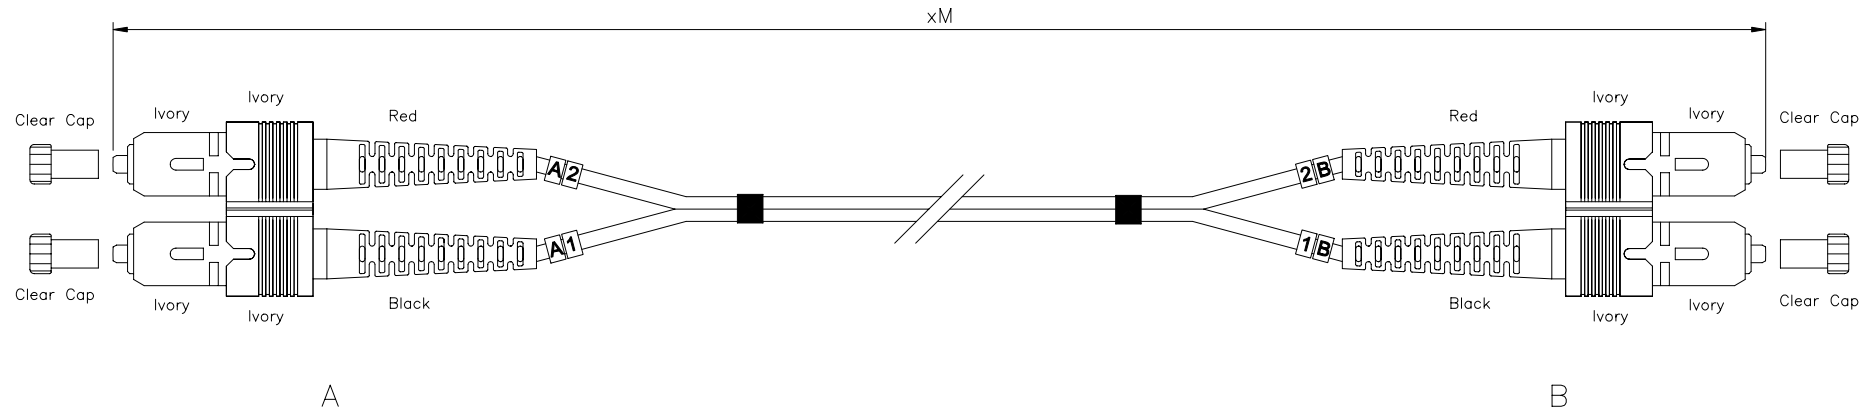

SPECIFICATION

- | | |
|-------------------|------------------------------|
| 1. Connector A | SC/PC MM |
| 2. Connector B | SC/PC MM |
| 3. Cable Type | Duplex ϕ 3.0mm 50/125um |
| 4. Length | xM |
| 5. Jacket Color | Gray |
| 6. Insertion Loss | <0.5 dB |
| 7. Package | Individual Bag |

OPERATION :

- Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- Ferrule End-face Radius : $10 < R < 30\text{mm}$
- Apex Offset : $< 50\mu\text{m}$
- Increase in insertion loss after 500 mating : 0.2 dB Max.
- Operation Temperature : -20° to $+70^{\circ}$
- Storage Temperature : -40° to $+80^{\circ}$
- Humidity (non-condensing) 95%RH