


FPS-CMPP2WJJ

FDH 4000/5000, 1X2 splitter, SC/APC



- *CommScope intends to release this product at a future date. At such time, this product will comply with the requirements of the Build America, Buy America Act and/or applicable waivers. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Splitter module
Product Series	FDH 4000 FDH 5000 FPS
Government Requirements	Build America Buy America (BABA) coming soon*

General Specifications

Device Type	Plug-and-play module
Functionality	Splitting
Application	For use in FDH 4000 and 5000 cabinets
Circuits, quantity	1
Distribution Type	1 x 2 splitter
Interface, front	SC/APC
Interface, Input	SC/APC
Interface, Output	SC/APC
Location of Manufacturing	Coming soon
Module Color	Black
Split Ratio	Symmetrical
Splitter, quantity	1

Ordering Tree

FPS-CMPP2WJJ

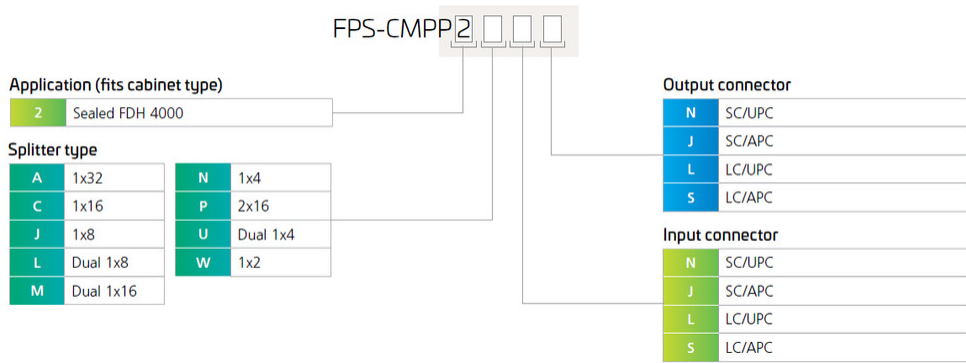

Optical Specifications

Directivity, minimum	60 dB
Polarization Dependent Loss, maximum	0.2 dB
Uniformity, maximum	1.1 dB
Wavelength Range	1260–1635 nm
Insertion Loss, Splitter, maximum	3.8 dB
Insertion Loss, Splitter, typical	3.1 dB
Return Loss, Splitter, minimum	55 dB

Packaging and Weights

Packaging quantity	1
---------------------------	---