




A Furukawa Company

AllWave[®] + Fiber - Zero Water Peak

The industry's first zero water peak single-mode fiber for reliable full-spectrum performance + enhanced bend performance

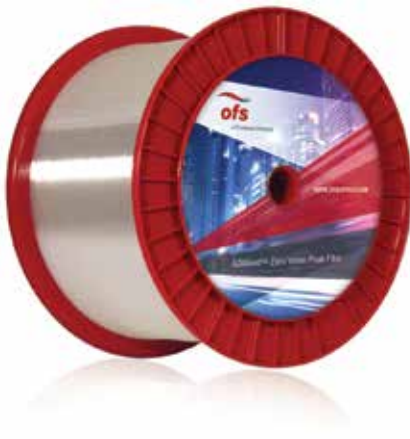

Applications

AllWave+ Fiber provides outstanding cable performance and design freedom for fiber management systems in:

- FTTX
- Local access
- Mobile backhaul
- Metro access
- Metro edge
- Campus backbones
- Long haul

Features and Benefits

- Low optical loss across the entire 1260-1625 nm spectrum
- 50% greater usable spectrum than conventional single-mode fiber
- Reduced bend loss across the bend-sensitive 1460-1625 nm S, C and L Bands
- Industry's tightest geometric control for ultra-low splice loss and improved connector performance
- High purity synthetic silica for long-term attenuation stability and mechanical reliability
- Ultra-low fiber PMD for speed and distance upgrades

Overview

When compared to conventional single-mode fiber, AllWave+ Zero Water Peak (ZWP) Single-Mode Fiber dramatically improves performance across the 1260 nm – 1625 nm spectrum. This fiber offers all the benefits of AllWave Fiber plus a 40% smaller minimum bend radius, a 50% lower bend loss and a 33% improved polarization mode dispersion (PMD) link design value.

Product Description

A combination ITU-T G.652.D and G.657.A1 compliant fiber, AllWave+ Fiber delivers low and stable loss in the 1360 nm -1460 nm E-band, enabling 16-channel CWDM, DWDM and FTTX support on a single fiber. In addition, this fiber's bend performance far exceeds G.652.D and complies with G.657.A1, supporting a minimum bend radius of 10 mm and lower bend loss than conventional single-mode fibers.

While this low bend loss improves performance and reliability, it also helps to lower installation costs by allowing the use of smaller cables and terminals. AllWave+ Fiber has the same 9.2 micron mode field diameter as and is fully backward compatible with the installed base of G.652 single-mode fiber for seamless splicing, testing and faster network turn-up.

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.

North America
Telephone: 508-347-8590
Toll Free: 800-799-7732
Fax: 508-347-1211
E-mail: fibersalesnar@ofsoptics.com

Asia Pacific
Telephone: +852 2506 5054
Fax: +852 2506 0166
E-mail: fibersalesap@ofsoptics.com

Caribbean, Latin America
Telephone: +1-508-347-8590
Fax: +1-508-347-1211
E-mail: fibersalescala@ofsoptics.com

Japan
Telephone: +81-3-3286-3424
Fax: +81-3-3286-3708 or 3190
E-mail: fibersalesjapan@ofsoptics.com

Europe, Middle East, Africa
Telephone: +45-43 48 3736
Fax: +45 4348 3444
E-mail: ofssalesdk@ofsoptics.com

China
Telephone: +86 10 6505 3660
Fax: +86 10 65059515
E-mail: fibersaleschina@ofsoptics.com



Copyright © 2016 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fiber-159 Date: 04/16

AllWave is a registered trademark of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Product Specifications

Physical Characteristics

Clad Diameter	125.0 ± 0.7 μm
Clad Non-Circularity	≤ 0.7 %
Core/Clad Concentricity Error (Offset)	≤ 0.5 μm, < 0.2 μm typically
Coating Diameter (Uncolored)	237 - 247 μm
Coating-Clad Concentricity Error (Offset)	≤ 12 μm
Tensile Proof Test	100 kpsi (0.69 GPa)
Coating Strip Force	Range: 1.0 N ≤ CSF ≤ 8.9 N
Standard Reel Lengths	50.4 km (31.3 miles)

Optical Characteristics

Attenuation	Maximum	Typical
at 1310 nm	≤ 0.34 dB/km	≤ 0.33 dB/km
at 1385 nm	≤ 0.31 dB/km	≤ 0.27 dB/km
at 1490 nm	≤ 0.24 dB/km	≤ 0.21 dB/km
at 1550 nm	≤ 0.20 dB/km	≤ 0.19 dB/km
at 1625 nm	≤ 0.24 dB/km	≤ 0.20 dB/km

Attenuation vs. Wavelength¹

Range (nm)	Reference (nm) λ	α
1285 – 1330	1310	0.03
1360 – 1480	1385	0.04
1525 – 1575	1550	0.02
1460 – 1625	1550	0.04

¹ The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α.

Attenuation Uniformity / Point Discontinuities at 1310 nm and 1550 nm	≤ 0.05 dB
---	-----------

Macrobending Attenuation:

The maximum attenuation with bending does not exceed the specified values under the following deployment conditions:

Deployment Condition	Wavelength	Induced Attenuation
1 turn on a 10 mm radius mandrel	1550 nm	≤ 0.75 dB
	1625 nm	≤ 1.5 dB
10 turns on a 15 mm radius mandrel	1550 nm	≤ 0.25 dB
	1625 nm	≤ 1.0 dB
100 turns on 30 mm radius mandrel	1550 nm	≤ 0.03 dB
	1625 nm	≤ 0.03 dB

Chromatic Dispersion

Zero Dispersion Wavelength (λ ₀)	1302 - 1322 nm
Zero Dispersion Slope (S ₀)	≤ 0.090 ps/nm ² -km
Typical Dispersion Slope	0.087 ps/nm ² -km

Cut-off Wavelength (λ _{cc})	≤ 1260 nm
---------------------------------------	-----------

Group Refractive Index

at 1310 nm	1.467
at 1550 nm	1.468

Mode Field Diameter

at 1310 nm	9.2 ± 0.4 μm
at 1550 nm	10.4 ± 0.5 μm (typical)

Polarization Mode Dispersion (PMD)³

Fiber PMD Link Design Value (LDV) ⁴	≤ 0.04 ps/√km
Maximum Individual Fiber	≤ 0.1 ps/√km
Typical Fiber LMC PMD	≤ 0.02 ps/√km

² As measured with low mode coupling (LMC) technique in fiber form, value may change when cabled. Check with your cable manufacturer for specific PMD limits in cable form.

³ The PMD Link Design Value complies with IEC 60794-3, September 2001 (N = 20, Q = 0.01%). Details are described in IEC 61282-3 TR Ed 2, October 2006.

Environmental Characteristics (at 1310, 1550 & 1625 nm)

Temperature Cycling (-60 + 85 °C)	≤ 0.05 dB/km
High Temperature Aging (85 ± 2 °C)	≤ 0.05 dB/km
Temperature & Humidity Cycling (at -10 °C to +85 °C and 85 to ~98% RH)	≤ 0.05 dB/km
Water Immersion (23 ± 2 °C)	≤ 0.05 dB/km
Dynamic Fatigue Stress Corrosion Parameter	(n ₀) ≥ 20