


## Ruggedized 3.0 mm Drop Cable

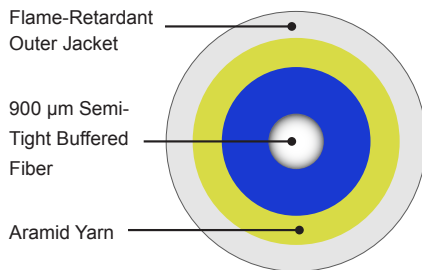

**Ruggedized 3.0 mm Drop Cable  
Cross-Section**

### Features

- 3.0 diameter cordage
- B2ca-s1-d0-a1
- Semi-tight buffered fiber 900 µm; strip 1 meter lengths
- Less than 0.1 dB macrobending attenuation at 1550 nm for 1 turn at 2.5 mm fiber bend radius
- Solid construction fiber with macrobending performance far better than ITU G.657.B3 requirements
- Backward compatible with installed G.652.D fibers
- Compliant with Telcordia 409 & ICEA S-83-596 requirements
- ICEA-S-115-730-2012 compliant for MDU applications
- Featuring EZ-Bend Optical Technology, a breakthrough developed by OFS Labs

### Benefits

- **MDU and In-Home Optimized:** Ideal for in-residence wiring
- **Faster, easier installation:** no extra steps to install bend limiters, conduits, or raceways
- **Compact installation and storage:** Conforms to building; slack fits in small spaces
- **Fast, easy, low loss splicing** to G.652.D fiber with existing core and clad aligned splice equipment
- **Familiar, standard connector termination:** Solid fiber construction can be terminated using standard optical connectors and polishing techniques
- **Familiar connector endface cleaning** using same process as with existing G.652 solid construction fiber
- **Greener Solution:** Free of heavy metals and RoHS-compliant; solution uses fewer total materials and energy than copper solutions
- **Easy to Strip:** Up to 1 meter lengths from buffer to aid with fusion splicing

---

### Product Description

The Ruggedized 3.0 mm Drop Cable is available as a low-smoke zero-halogen indoor/outdoor construction. Route throughout living unit with negligible signal loss. Ideal for aggressive routing environments where space is at a premium, the EZ-Bend 3.0 Cable offers reliable support for MDU and in-home wiring applications.



A Furukawa Company

## Ruggedized 3.0 mm Drop Cable

Performance	
Flame Performance	
<b>CPR Rating</b>	B2ca-s1, d0, a1
Mechanical and Environment Performance	
Telecordia GR-409, ICEA S-83-596 compliant, ICEA-S-115-730-2012 Compliant; for MDU	
Temperature Range	
<b>Installation</b>	-20 °C to 60 °C (-4 °F to 140 °F)
<b>Operation</b>	-40 °C to 70 °C (-40 °F to 158 °F)
<b>Storage</b>	-40 °C to 70 °C (-40 °F to 158 °F)
Maximum Tensile Rating	
444 N (100 lb)	
Compressive Load	
100 N/cm	
Attenuation	
<b>@ 1310 nm</b>	Typical: 0.35 dB/km; Maximum: 0.4 dB/km
<b>@ 1550 nm</b>	Typical: 0.25 dB/km; Maximum: 0.3 dB/km



Ruggedized 3.0 mm Drop Cable shown behind molding

Product Information	
Indoor/Outdoor Cables	
<b>Cable Type</b>	3.0 Indoor/Outdoor LSZH
<b>Nominal Weight</b>	8.4 kg/km (0.66 lb/100 ft)
<b>Part Number</b>	IR30-001C-DHK-4 (Black) IR30-001C-DHW-4 (White)
<b>CPR Rating</b>	B2ca-s1, d0, a1
<b>DoP Lookup: <a href="http://www.ofs-sales.com/cpr/">www.ofs-sales.com/cpr/</a></b>	<b>IR30-001-C-H</b>

**For additional information please contact your sales representative.**

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2021 OFS Fitel, LLC.  
All rights reserved, printed in USA.

OFS Marketing Communications  
Doc ID: fap-252-A4 Date: 06/21



EZ-Bend is a registered trademark of OFS Fitel, LLC. UL is a registered trademark of Underwriters Laboratories, Inc. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.