


19.636 MAX
18.312
HOLE TO HOLE
17.812
INSIDE RAIL

.390 MIN
DOOR CLEARANCE


NOTE:
1. 19" EIA RACK MOUNT COMPLIANT.
2. RAILS ACCEPT 3/8" CAGENUT.
3. BLACK POWDER COAT.

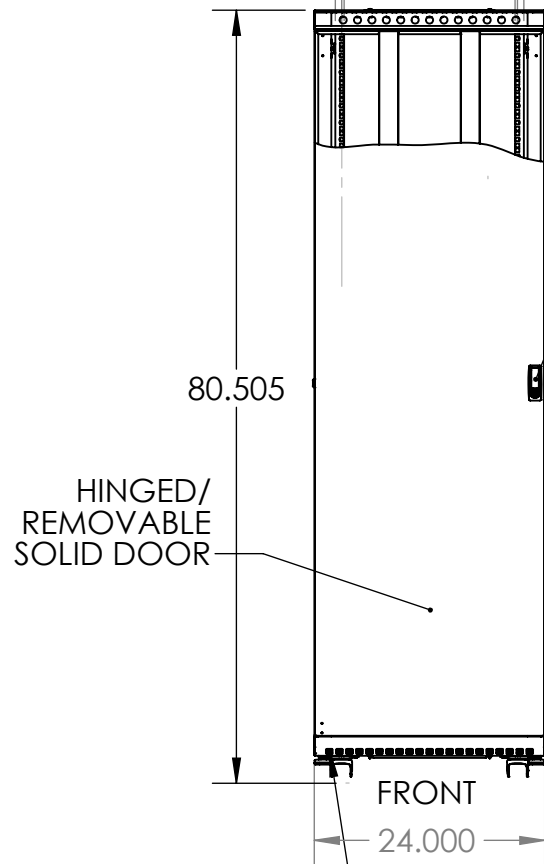

KEYED LOCK
FRONT, SIDES
AND REAR

HINGED/
REMOVABLE
SOLID DOOR

VENTING FRONT,
SIDES AND REAR,
TOP AND BOTTOM

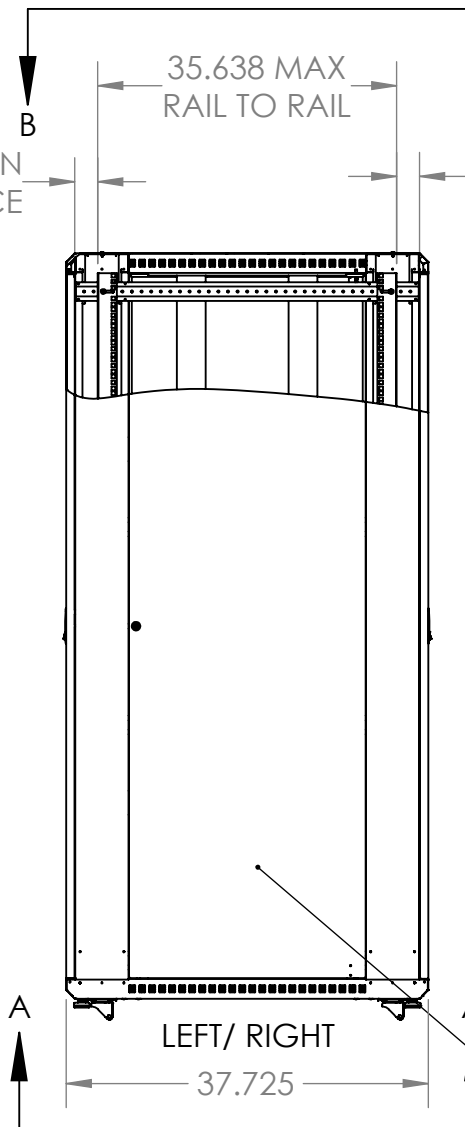

.390 MIN
DOOR CLEARANCE

HINGED/
REMOVABLE
SOLID DOOR

LEFT/ RIGHT

REAR
HINGED/ REMOVABLE
SIDE PANELS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/8$
ANGULAR: BEND ± 1 DEGREE
TWO PLACE DECIMAL $\pm .03$
THREE PLACE DECIMAL $\pm .01$

Surface Area

MATERIAL

FINISH

DO NOT SCALE DRAWING

WEB PRINT

NEXT ASSY	USED ON
APPLICATION	

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

KENDALL HOWARD

TITLE:
**42U LINIER FS SOLID
FRONT/ SOLID REAR**

SIZE	DWG. NO.	REV
A	3108-3-001-42 WP	
SCALE: 1:20	WEIGHT: 175.58	SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
KENDALL HOWARD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF KENDALL HOWARD
IS STRICTLY PROHIBITED.

