

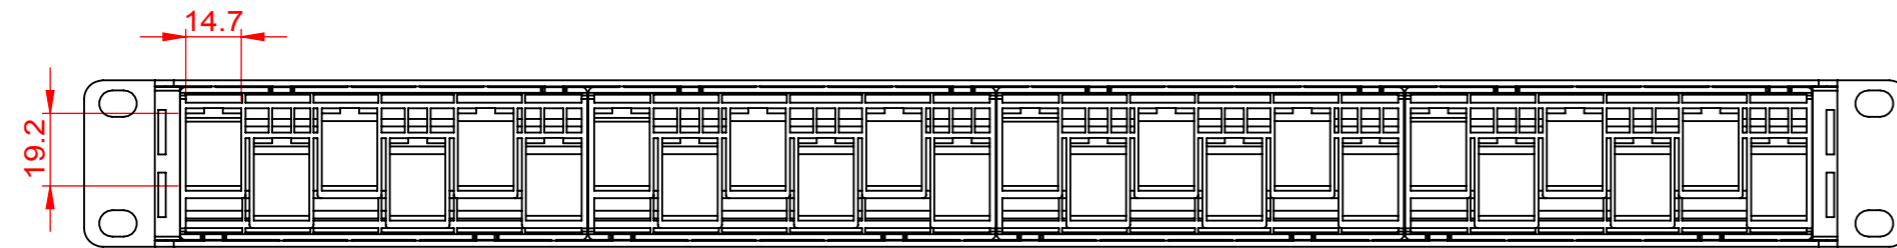
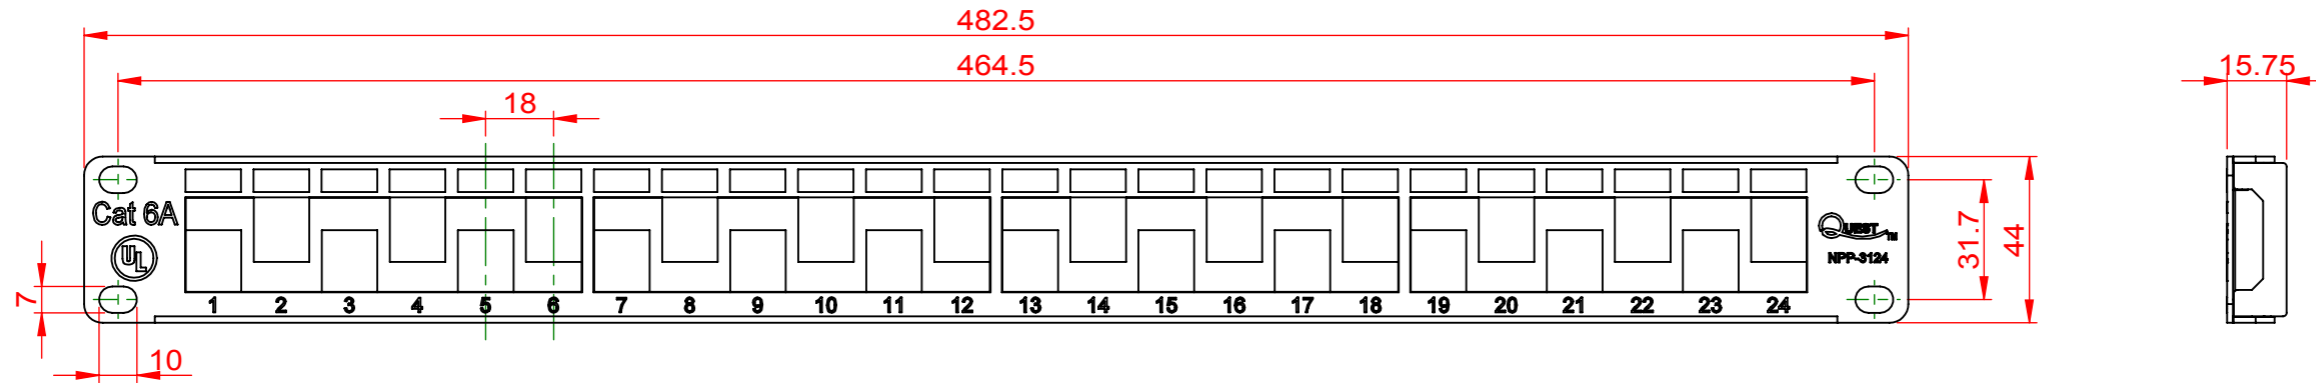






REFERENCE





REAR VIEW

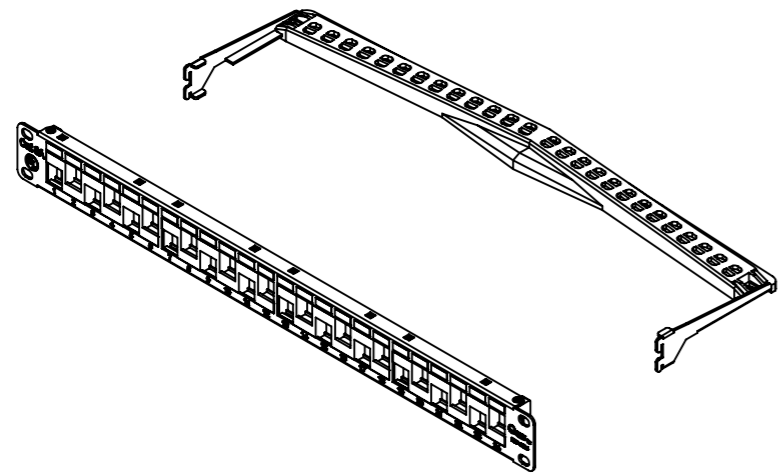

IDC CAP
SCALE : 1:1



KEYSTONE JACK
SCALE : 1:1

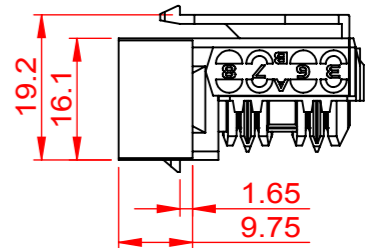

MATERIAL
 KEYSTONE JACK HOUSING : ABS,UL94V-0.
 JACK CONTACTS : PHOSPHOR BRONZE WIRE,50U" GOLD PLATED.
 IDC PLASTIC : PC,UL94V-0.
 IDC TERMINALS : PHOSPHOR BRONZE ,TIN OVER NICKEL UNDERCOAT.
 PANEL : SPCC.
 PLASTIC FRAME : ABS,UL94V-0.
 WIRE MANAGEMENT HOLDER : NYLON+GF,UL94V-0.
 WIRE MANAGEMENT HANGER : SECC.

PHYSICAL CHARACTERISTICS
 OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
 STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
 HUMIDITY : 10%-90%RH.

ACCORDING TO : ANSI/TIA-568-C.2
 ISO/IEC 11801 2nd Edition
 IEC 60603-7

ENCLOSURE

KEYSTONE X 24 PCS
 IDC CAP X 24 PCS
 WIRE MANAGEMENT HOLDER (L) X 1 PC
 WIRE MANAGEMENT HANGER (R) X 1 PC



Scale	2:3				
3rd Angle Projection					
Unit	mm				
Date	2013/2/21				
Tolerance					
~20	~50	~150	150~	ANGLE	
±0.2	±0.4	±0.5	±1.5	±2°	

QUEST TECHNOLOGY INTERNATIONAL, Inc
 Quest Technology Int'l, Inc
 11200 NW 138th St., Medley, FL 33178

Part No. NPP-3124

Title: CAT6A 19" UTP PATCH PANEL, W/24 JACKS

Drawn by	Checked by	Drawing No.
Oliver		3012KIA24C6ABKWQ010