

# 19" PDUs, SWITCHED

GLPDU19-0815



FRONT

## RACK POWER DISTRIBUTION DESIGNED FOR EASE OF USE, POWER MONITORING, AND SMART CAPABILITIES

Switchable PDUs consist of key features needed to manage high density equipment racks or wiring closets.

PDUs deliver reliable power distribution to multiple units of connected equipment. These PDUs compliment any current power source and are compatible with any manufacturer's UPS.

For more PDU options, visit [GreatCabinets.com/Power](http://GreatCabinets.com/Power)

## FEATURES

### Plug and Power

- PDUs provide up to 8 receptacles for power distribution

### Web/SNMP

- Interface with monitoring software and on/off control

### POP3/SMTP

- For sending and receiving control commands or user data

### Multiple User Access

- Multiple RS-232 console port at the same time SP22/NP22

### Password Protection

- Protecting user management and the port owner and access permission could be set

### Autonomous Auto Ping

- For each power outlet by ICMP ping package, and could be reboot


MODEL		GLPDU19-0215	GLPDU19-0815
INPUT	Power input	6ft, C13 to 5-15P	
	Input current	15A	
	Input voltage	120VAC	
OUTPUT	Power outlets	2	8
	Outlet type	(2) NEMA 5-15R	(8) NEMA 5-15R
PHYSICAL	Dimensions (W x D x H)	6.0 x 6.8 x 1.9 in	19.0 x 7.0 x 1.75 in
	Display	(6) LEDs	(16) LEDs
COMMUNICATIONS INTERFACE	Console port	Baud rate: 115200; 8 data bits; no parity; 1 stop bit; no hardware handshaking	
	Ethernet	10/100 Base-T	
	Network protocol	ICMP, IP, TCP, DHCP, Telnet, DNS, POP3/SMTP, SNMP, HTTP, and BootP	
ENVIRONMENT	Operating temperature	32°F-122°F (0°C-50°C)	
	Storage temperature	-20°F-140°F (-29°C-60°C)	
	Humidity	10-90%	
WARRANTY	2 years (USA and Canada)		
APPROVALS	UL		
INCLUDED IN BOX	User manual, mounting brackets, RJ-45 to RS232 cable		

GLPDU-0215



FRONT

GLPDU-0215

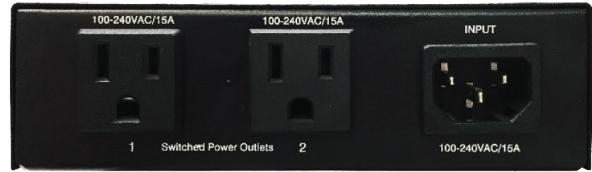

REAR

GLPDU19-0815



REAR

*Note: Horizontal mounting brackets for 19" mounting are included with each PDU and must be installed by the user.*