


WDX

WALL MOUNT: STRONG AND SECURE

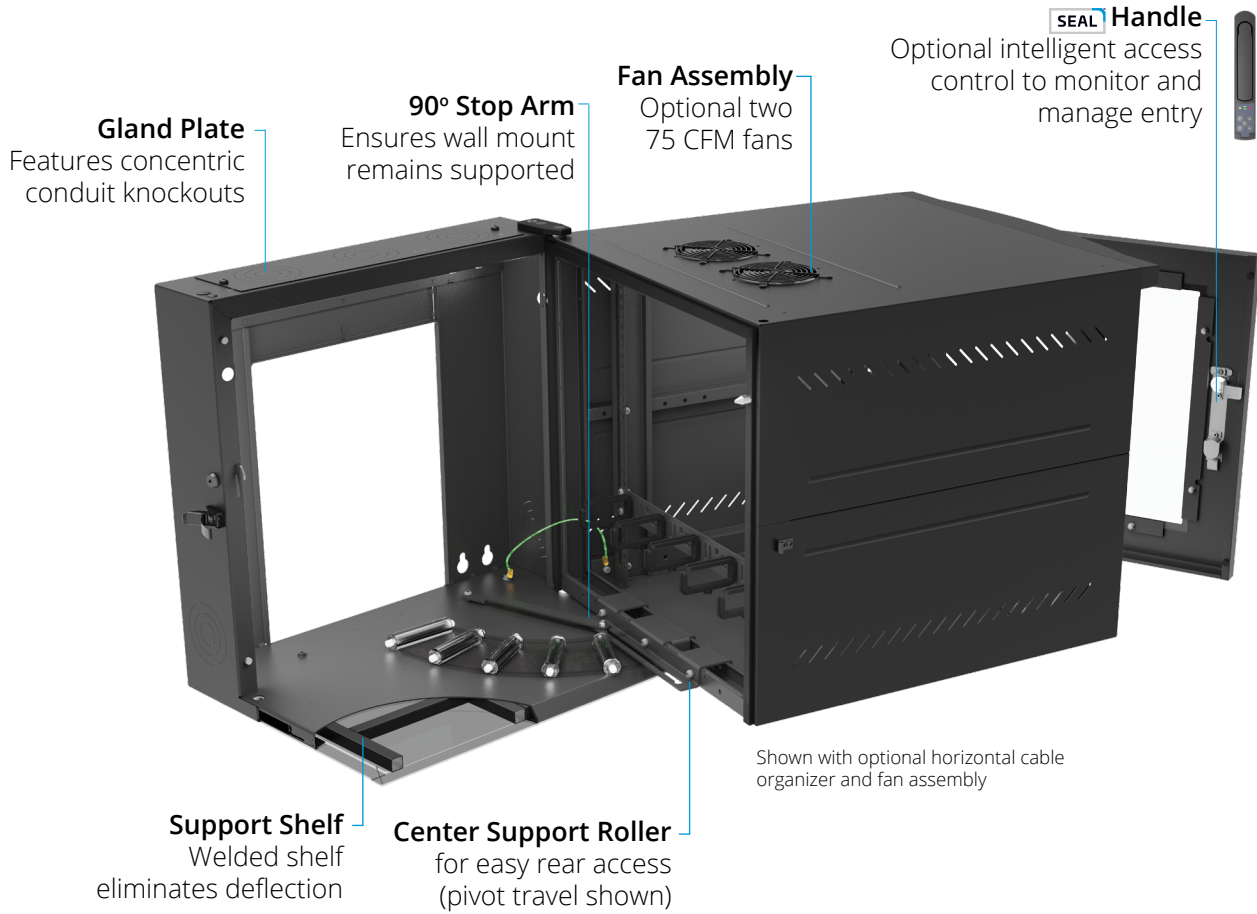

SEAL Security Ready. Add intelligent access to create a SEAL® solution!

Height	Door	Color	Handle	Airflow	Example
GLXXWDX	X-	B-	XX-	XX-	Configured WDX
24	P (Plexi)	B (Black)	SH (Swing Handle)	AF (Fan Included)	GL24WDXP-B-SH-AF
36	M (Mesh)		SC (SEAL Combo) ¹	00 (None)	
48	S (Solid)		SE (SEAL Electronic) ²		

¹ 4 Digit combination handle; ² Electronic handle SEAL-TLDA



FEATURES

- Two pair of 3/8" sq. (M6) mounting rails
- Front pair of rails is part of a (depth adj.) inner frame that provides increased support for heavy equipment
- 150mm x 25mm Standard door handle cutout
- Reversible door for left-hand or right-hand opening
- Welded back panel and support "shelf" completely eliminates deflection
- Standards: UL2416, RoHS II


Gland plates features concentric conduit knockouts; gland plate is removable

Removable gland plate to install optional fan assembly

Optional front door inserts
Solid steel panel
Perforated steel panel
Plexi panel

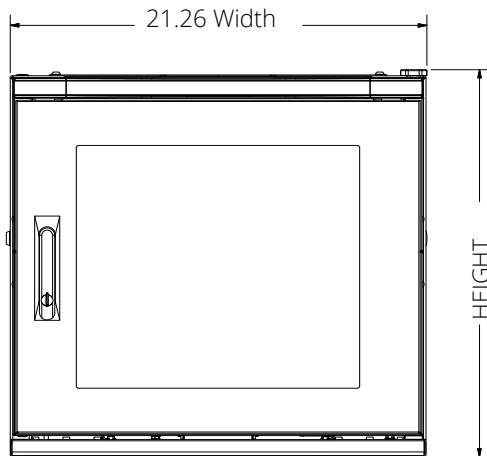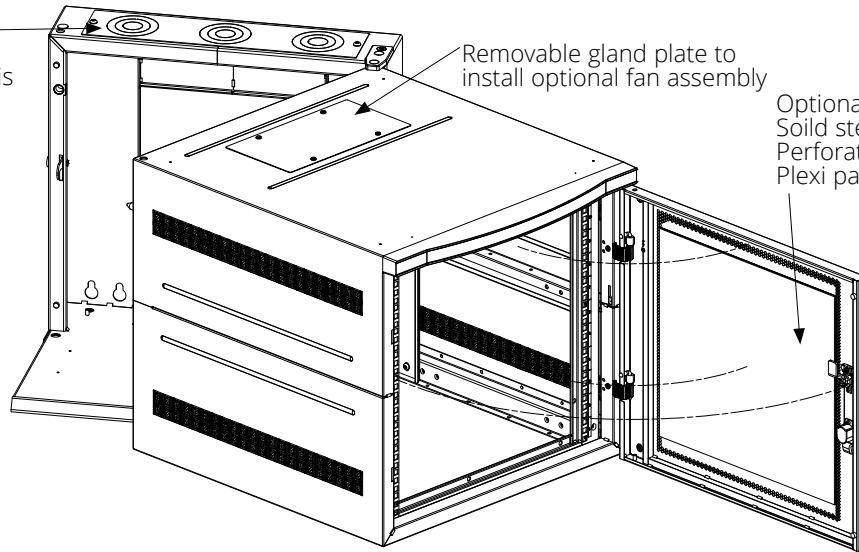

FRONT VIEW WITH DOOR

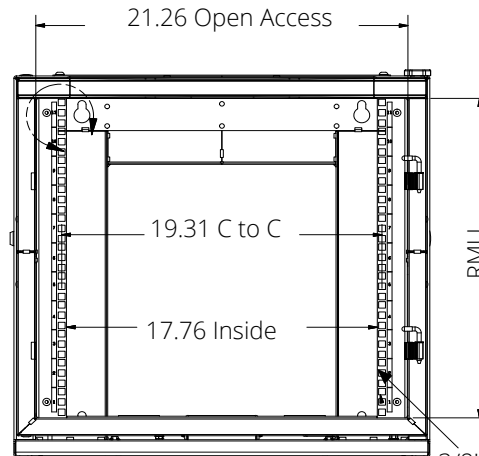

FRONT VIEW WITHOUT DOOR

3/8" Equipment mounting holes with M6 hardware

Specs	RMU	Weight Cap. lbs.
GL24WDX	11	250
GL36WDX	18	300
GL48WDX	25	350

All sizes: 24"W x 32"D; 28" usable depth; 23" max. rail spacing

POPULAR ACCESSORIES

Part No.	Description
CM-04	Horizontal cable organizer with five 3.5" x 5", ¼ turn "D" rings; 2 RMU
CM-05	Horizontal cable organizer with five 1.5" x 3.5", ¼ turn "D" rings; 1 RMU
7219	6 receptacles, 5-15R receptacle, 5-15P plug, 15 amp, 125V power strip for 19" mounting
CBB-19	Copper Bus Bar for 19" mounting
DK4	Dust resistant kit, includes cover plates and hardware
7206-FR-A18	Stationary shelf (front/rear mount adjustable), 17.5"W x 18"D, 150 lb. weight capacity