


# SMOOTH WALL CONDUIT

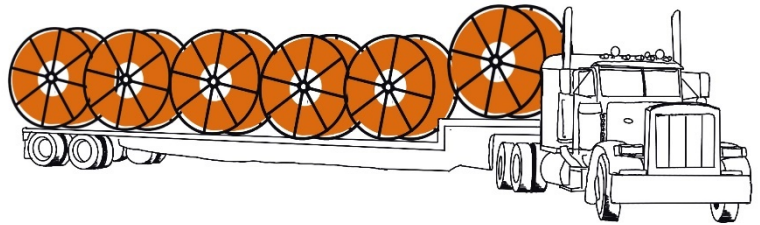

SDR		3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"
SDR9	OD	1.050	1.315	1.660	1.900	2.375	3.500	4.500
	ID	0.818	1.023	1.292	1.478	1.847	2.722	3.500
	WALL	0.117	0.146	0.184	0.211	0.264	0.389	0.500
	WT/FT	0.150	0.230	0.360	0.480	0.750	1.360	2.688
SDR11	OD	1.050	1.315	1.660	1.900	2.375	3.500	4.500
	ID	0.860	1.075	1.358	1.554	1.943	2.864	3.682
	WALL	0.095	0.120	0.151	0.173	0.216	0.318	0.409
	WT/FT	0.120	0.190	0.300	0.400	0.640	1.400	2.250
SDR 13.5	OD	0.000	1.315	1.660	1.900	2.375	3.500	4.500
	ID	0.000	1.121	1.414	1.618	2.023	2.982	3.834
	WALL	0.000	0.097	0.123	0.141	0.176	0.259	0.330
	WT/FT	0.000	0.160	0.260	0.340	0.530	1.160	1.910

SCHEDULE		3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"
SCH 40	OD	1.050	1.315	1.660	1.900	2.375	3.500	4.500
	ID	0.784	1.009	1.340	1.570	2.027	3.016	3.970
	WALL	0.113	0.133	0.140	0.145	0.154	0.213	0.237
	WT/FT	0.150	0.220	0.290	0.350	0.470	0.960	1.380
SCH 80	OD	1.050	1.315	1.660	1.900	2.375	3.500	4.500
	ID	0.702	0.915	1.232	1.452	1.887	2.828	3.746
	WALL	0.154	0.179	0.191	0.200	0.218	0.300	0.337
	WT/FT	0.190	0.280	0.380	0.460	0.640	1.310	1.914

## Material

We use only virgin material that meets or exceeds ASTM D-3350 standards

## Colorant

Our colorants contain UV protection and are heavy metal free

## Print Line

Sequential footage markings, customized print lines are available

## Sizes

Available in 3/4"-4" other SDR sizes are available upon request