



FF-OCS-4X

Product Description

The Multilink FF-OCS-4X is a wall mounted NEMA 1, 2, 3, 4, 4X, 12, and 13 rated enclosure with a lockable outer door and locking inner network security door. The unit has a (4) termination panel capacity and features two ground lugs. Cable entrance locations can be obtained in the field by drilling and utilizing standard weather-tight conduit fittings.

General Specifications

Dimensions:	15.84" H x 13.85" W x 6.79" D (including brackets)
Weight:	≈ 10 lbs.
Panels:	(4) Multilink Adapter Panels (see individual panel capacities)
Splice Trays:	(4) 1120-SSTP or 3000-SSTA
Material:	Fiberglass Reinforced Polyester
Inner Material:	Steel
Inner Finish:	Black textured

Ordering Information

<u>Stock ID</u>	<u>Description</u>
045-741-10	FF-OCS-4X Outdoor Splice Enclosure
072-059-10	1120-SSTP (12 Single Fusion Splice Tray)
70505K	3000-SSTA (24 Single Fusion Splice Tray)

NOTE: For details on available adapter panels please refer to the Multilink Catalog



Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com

Detailed Dimensions



FF-OCS-4X

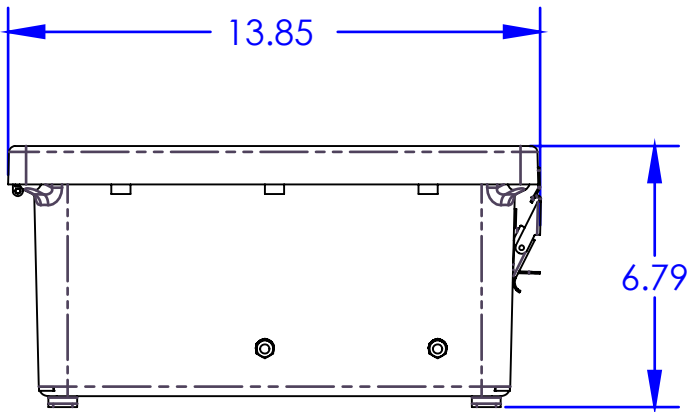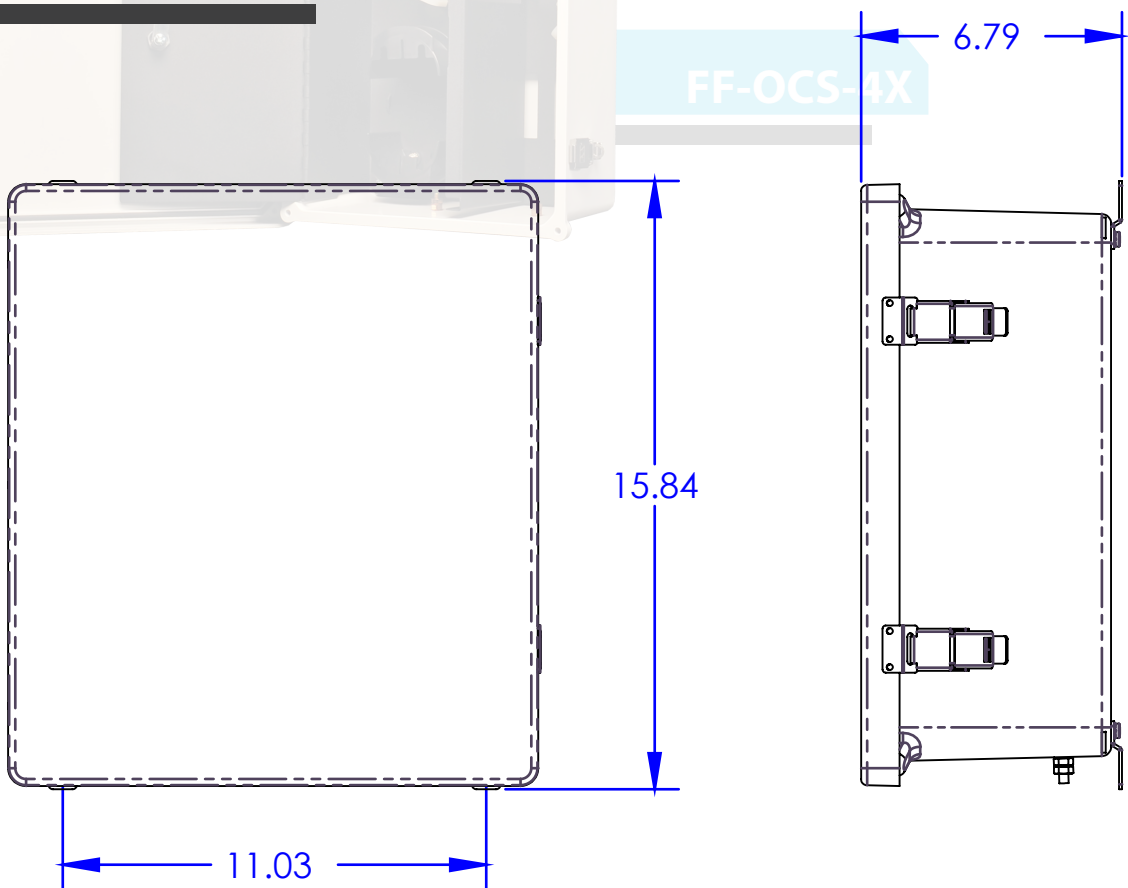

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com