



**FF-OCS-6X**

## Product Description

The Multilink FF-OCS-6X is a wall mounted NEMA 1, 2, 3, 4, 4X, 12, and 13 rated enclosure with a lockable outer door and locking inner network security door. The unit has a (6) termination panel capacity and features a splice tray holder and two ground lugs. Cable entrance locations can be obtained in the field by drilling and utilizing standard weather-tight conduit fittings.

## General Specifications

<b>Dimensions:</b>	17.9" H x 16.1" W x 10.4" D (excluding brackets)
<b>Weight:</b>	≈ 13 lbs.
<b>Panels:</b>	(6) Multilink Adapter Panels (see individual panel capacities)
<b>Splice Trays:</b>	(4) 1120-SSTP
<b>Material:</b>	Fiberglass Reinforced Polyester
<b>Inner Material:</b>	Steel
<b>Inner Finish:</b>	Black textured

## Ordering Information

<u>Stock ID</u>	<u>Description</u>
10-3338	FF-OCS-6X Outdoor Splice Enclosure
072-059-10	1120-SSTP (12 Single Fusion Splice Tray)


NOTE: For details on available adapter panels please refer to the Multilink Catalog

### Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com

**Detailed Dimensions**

FF-OCS-6X

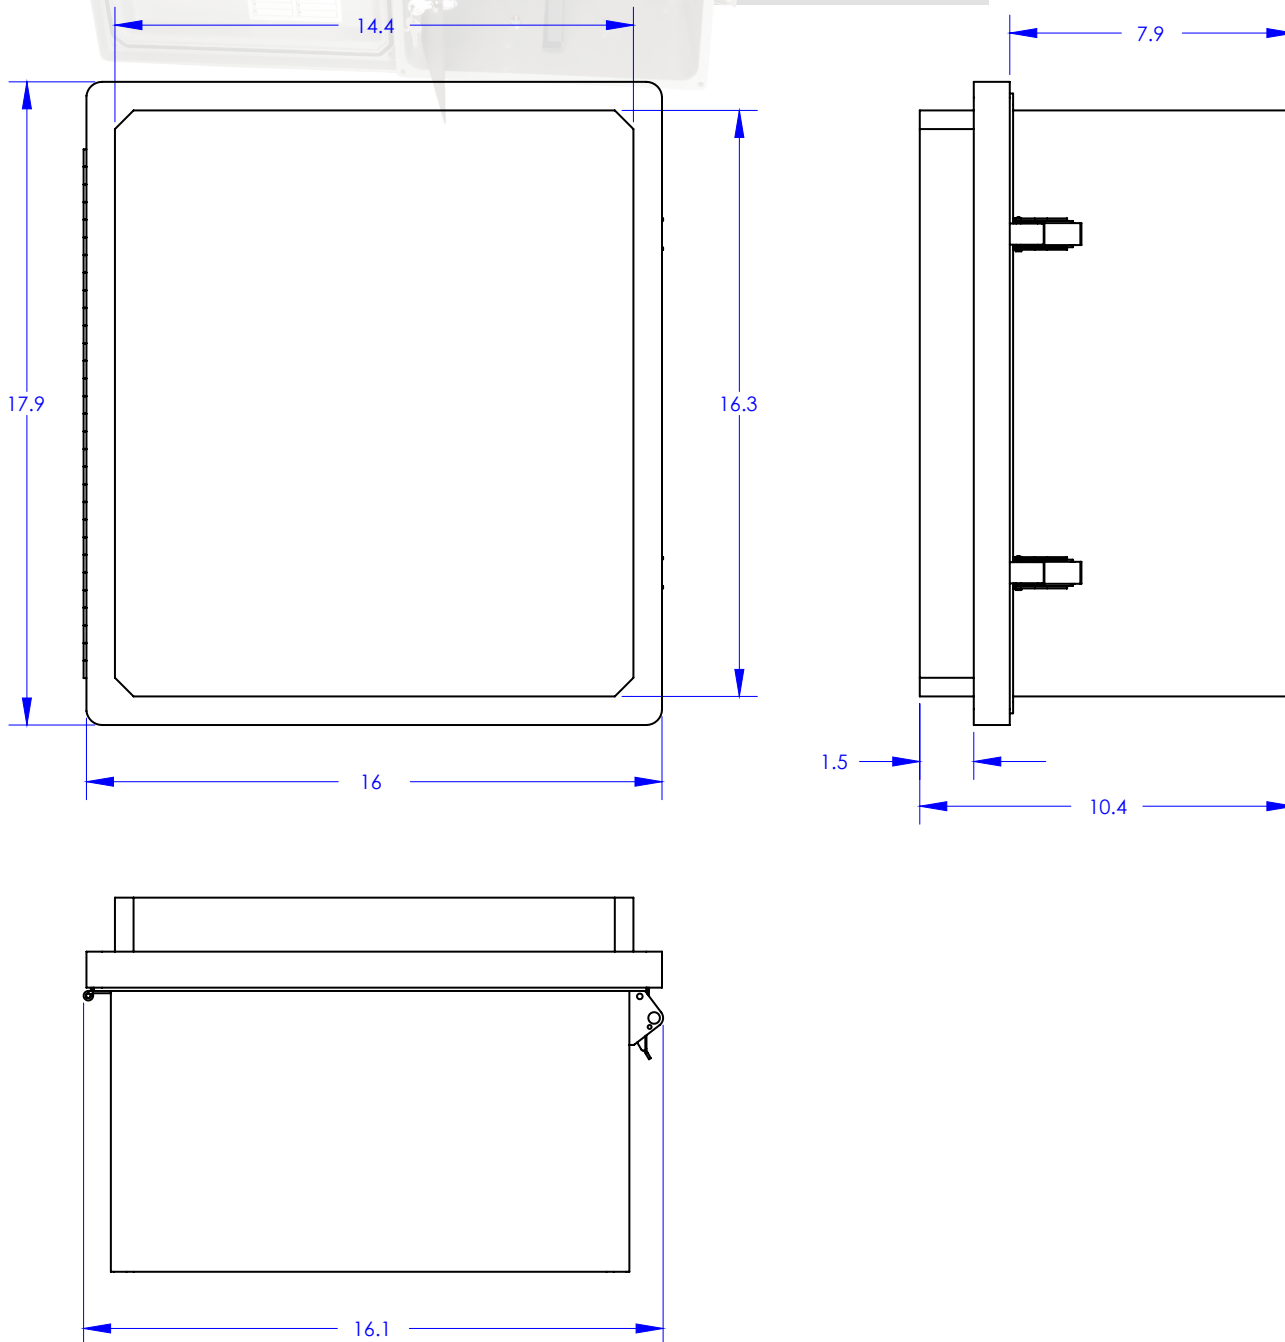

**Contact Us**

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 440 366 6966
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Fax: +1 440 366 6802
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: lasupport@gomultilink.com