
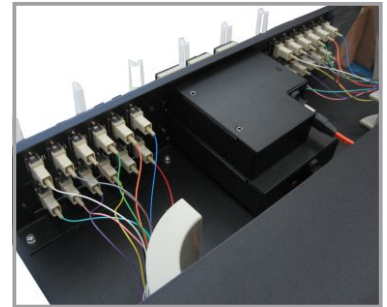


WC-2U6P

Features


- Available for IEC19"/23" & ETSI standard.
- Max capacity is 144 "Fibers" by using 6 adapter panels of 6 ports LC Quad;
Max capacity is 72 "Fibers" by using 6 adapter panels of 6 ports SC Duplex;
Max capacity is 72 "Fibers" by using 6 adapter panels of 12 ports ST/FC.
- RAL7035 or RAL9005, and RoHS compliant.
- One unit per package which is in 21.58*17.33*6.5 inches.
- Weight is 16.1 lbs after packaged.

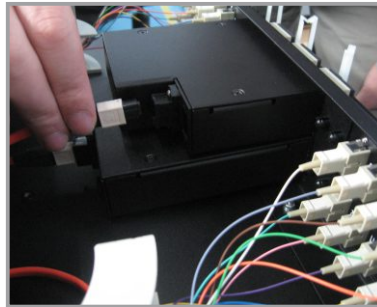

Application


Dimension For Body and Panel

Other panel plate


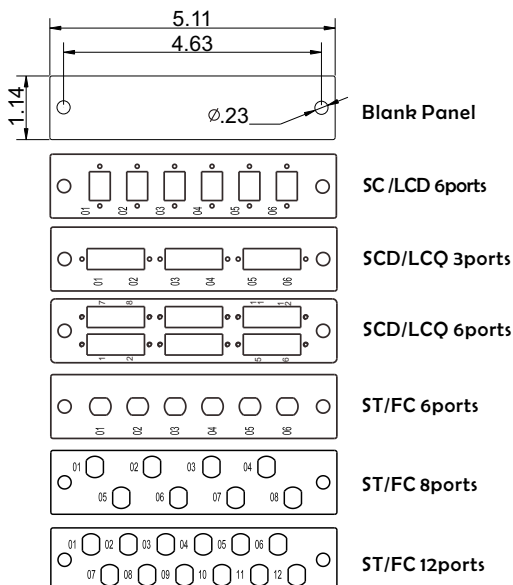


Machine performance



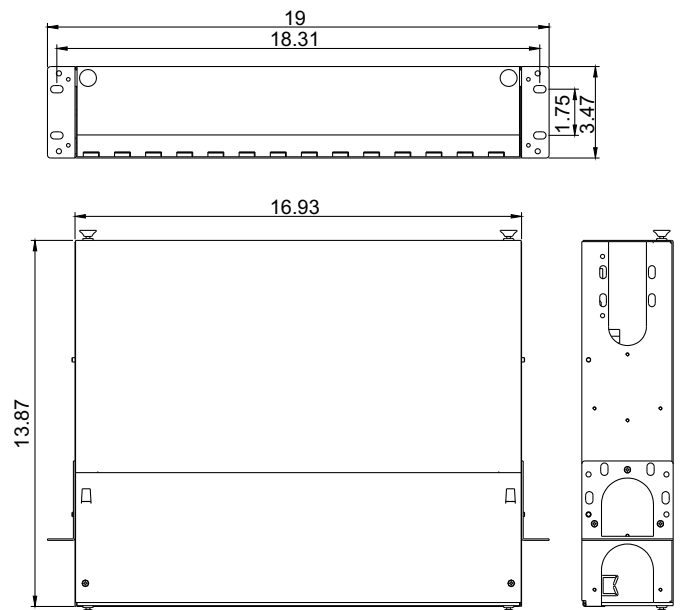

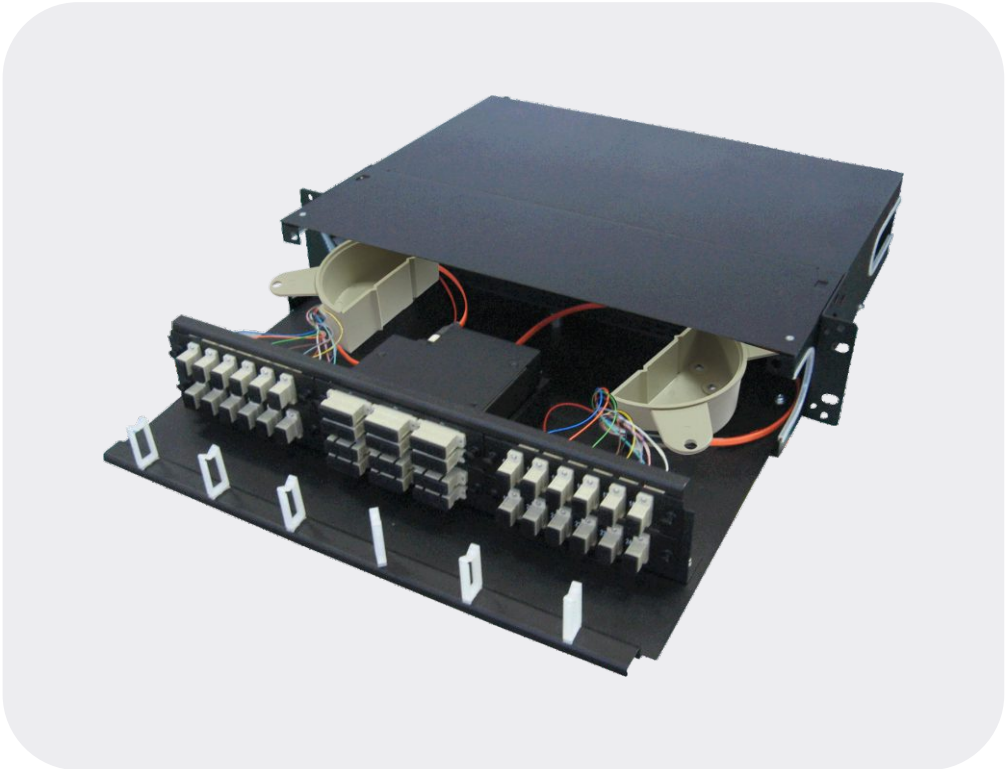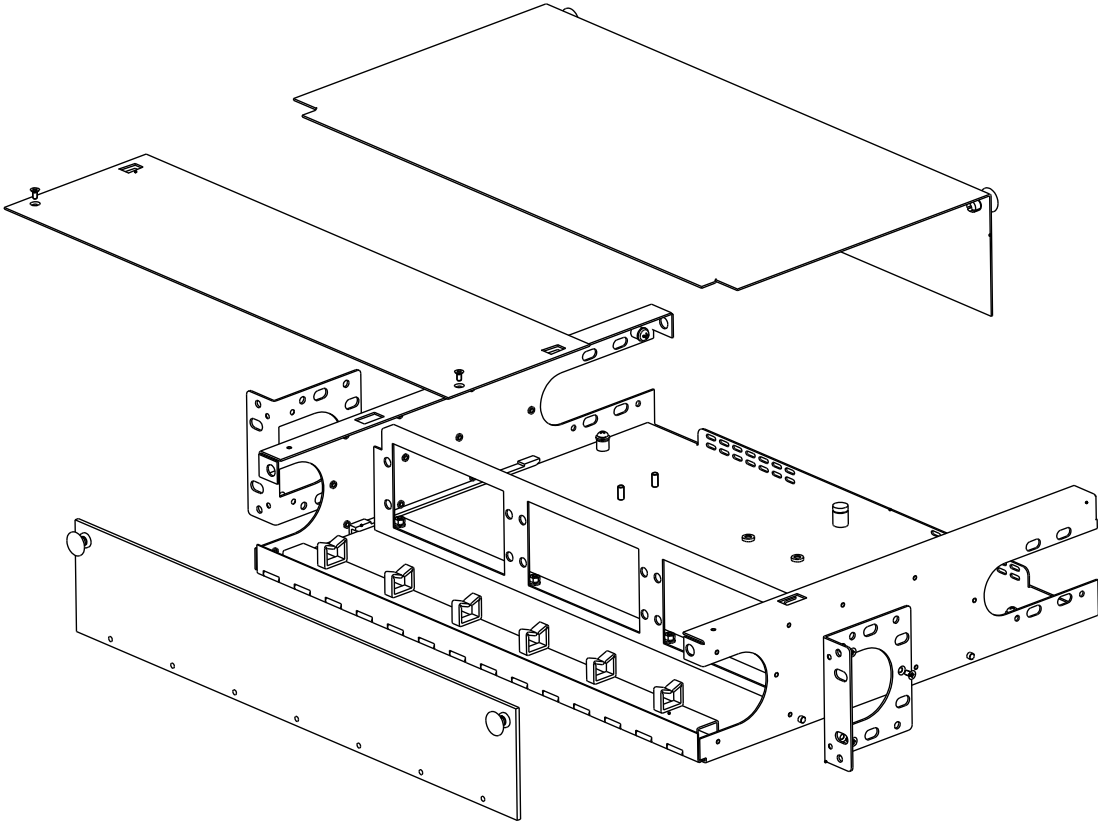



- Dimension



Assembly



Included Accessories
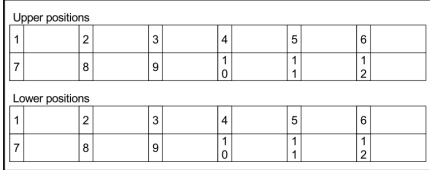
| | | |
|---|---|---|
|  |  |  |
| <p>Mounting screws M6</p> | <p>Cable spool</p> | <p>Cross recess head screw M4x8mm (for tray)</p> |
|  |  |  |
| <p>Radiation sticker</p> | <p>4" plastic tie wraps</p> | <p>2" cable managers with adhesive bottom</p> |
|  |  | |
| <p>Port identification labels</p> | <p>M4 Nut/ Plain washer/Spring washer (for cable spool)</p> | |

STANDARD CONFIGURATION

| WC-2U6P | |
|--|--------|
| Description | Number |
| Mounting screws M6 | 4 |
| 4" plastic tie wraps | 4 |
| Radiation sticker | 1 |
| 2" cable managers with adhesive bottom | 4 |
| Port identification labels | 3 |
| Cross recess head screw M4x8mm (for tray) | 2 |
| Cable spool | 2 |
| M4 Nut/ Plain washer/Spring washer (for cable spool) | 4 |