


FPS-CMPP2NJJ

FDH 4000/5000, 1X4 splitter, SC/APC



- *CommScope intends to release this product at a future date. At such time, this product will comply with the requirements of the Build America, Buy America Act and/or applicable waivers. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification


| | |
|--------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Splitter module |
| Product Series | FDH 4000 FDH 5000 FPS |
| Government Requirements | Build America Buy America (BABA) coming soon* |

General Specifications

| | |
|----------------------------------|---------------------------------------|
| Device Type | Plug-and-play module |
| Functionality | Splitting |
| Application | For use in FDH 4000 and 5000 cabinets |
| Circuits, quantity | 1 |
| Distribution Type | 1 x 4 splitter |
| Interface, front | SC/APC |
| Interface, Input | SC/APC |
| Interface, Output | SC/APC |
| Location of Manufacturing | Coming soon |
| Module Color | Black |
| Split Ratio | Symmetrical |
| Splitter, quantity | 1 |

Ordering Tree

FPS-CMPP2NJJ

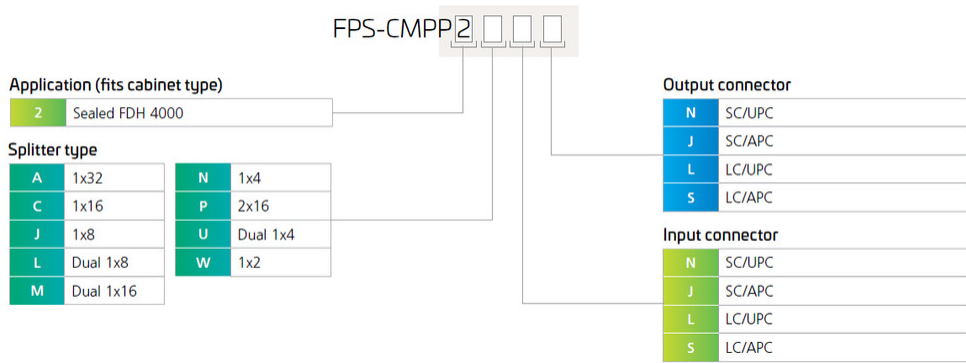

Optical Specifications

| | |
|---|--------------|
| Directivity, minimum | 60 dB |
| Polarization Dependent Loss, maximum | 0.2 dB |
| Uniformity, maximum | 0.8 dB |
| Wavelength Range | 1260–1635 nm |
| Insertion Loss, Splitter, maximum | 7.2 dB |
| Insertion Loss, Splitter, typical | 6.6 dB |
| Return Loss, Splitter, minimum | 55 dB |

Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|

Regulatory Compliance/Certifications

| Agency | Classification |
|------------|-----------------------------------|
| CHINA-ROHS | Above maximum concentration value |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |

