FL2-R770072A0-0D00



FL2000 Fiber Termination Panel, 72 SC/UPC, singlemode, 5RU, 23 in, putty white

Product Classification

Regional Availability Latin America | North America

Portfolio CommScope®
Product Type Fiber patch panel

Product Series FL2000

General Specifications

Functionality Patching

Adapter Packs Included, quantity 12

ColorPutty whiteGrowth ConfigurationFully loadedInterface, frontSC/UPCRack TypeEIA 23 in

Rack Units 5

Shelf MovementHingedSplicing Capacity, maximum0Total Ports, quantity72

Dimensions

 Height
 222.25 mm | 8.75 in


 Width
 584.2 mm | 23 in

 Depth
 256.54 mm | 10.1 in

Ordering Tree



FL2-R770072A0-0D00

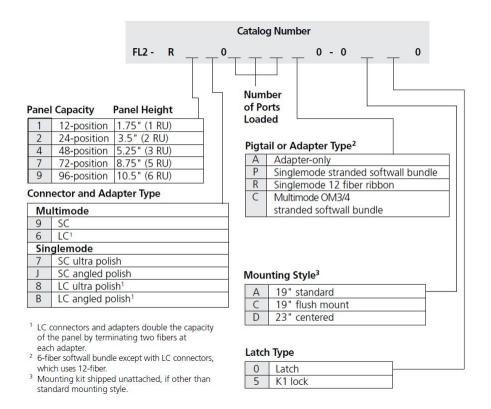

Material Specifications

Finish Powder coated

Material Type Steel

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

Operating Temperature $-40 \,^{\circ}\text{C} \text{ to } +70 \,^{\circ}\text{C} \, (-40 \,^{\circ}\text{F to } +158 \,^{\circ}\text{F})$

Storage Temperature -40 °C to +85 °C (-40 °F to +185 °F)

Packaging and Weights

Included Mounting hardware

Packaging quantity

Regulatory Compliance/Certifications



FL2-R770072A0-0D00

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

