FPCA-7KYP



Fiber Optic Patch Cord, singlemode, 1.2 mm OFNP jacket, SC/UPC-LC /UPC, yellow

- 1.2 mm diameter cable provides a 65% space savings over commonly used 2.0 mm cable
- 1.2 mm diameter fiber patch cords use Reduced Bend Radius (RBR) fiber cable
- Typically used in environments where space constraints and cable routing prove most challenging
- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

Regional Availability	Europe Latin America Middle East/Africa North America
Product Type	Fiber patch cord, simplex
Product Series	FPCA
Government Requirements	Build America Buy America (BABA) compliant*
General Specifications	
Connector A, quantity	1
Color, boot A	Blue
Color, connector A	Blue
Connector B, quantity	1
Color, boot B	Blue
Color, connector B	Blue
Interface, Connector A	LC/UPC
Interface, Connector B	SC/UPC
Jacket Color	Yellow
Location of Manufacturing	Claremont, North Carolina
Total Fibers, quantity	1
Transmission Standards	TIA/EIA-604 FOCIS-3
Dimensions	

Diameter Over Jacket

1.2 mm | 0.047 in


Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: October 1, 2024



FPCA-7KYP

Ordering Tree

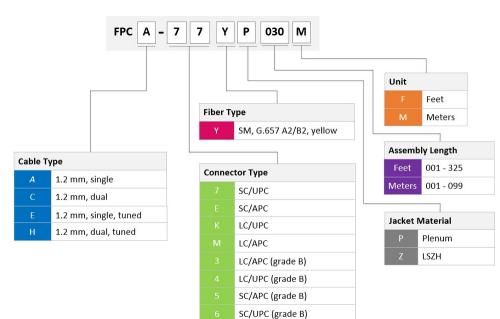

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2/B2
Insertion Loss, maximum, connector A	0.3 dB
Insertion Loss, maximum, connector B	0.2 dB
Return Loss, minimum, connector A	55 dB
Return Loss, minimum, connector B	55 dB

Environmental Specifications

Environmental Space	Plenum
Qualification Standards	GR-326 CORE GR-409 GR-449-CORE
Packaging and We	ghts
Packaging quantity	1
Regulatory Compliance/Certifications	
Agency Cl	assification

Agency

CHINA-ROHS

Above maximum concentration value

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: October 1, 2024



FPCA-7KYP

REACH-SVHC

ROHS

UK-ROHS



Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant/Exempted

Compliant/Exempted

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: October 1, 2024

