

# LX1SXB06AAN

---



## Single Width LGX Module, CEx 2, 6 circuits, LC/APC connectors

- \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   China   EMEA   India   Latin America   North America
<b>Product Type</b>	Coexistence Element (CEx)
<b>Product Series</b>	LGX
<b>Government Requirements</b>	Build America Buy America (BABA) compliant*

## General Specifications


<b>Circuits, quantity</b>	6
<b>Interface, Input</b>	LC/APC
<b>Interface, Output</b>	LC/APC
<b>Location of Manufacturing</b>	Waived per BABA waiver for BEAD Program

## Port Configuration

# LX15XB06AAN

Module Type	Networks/Services	Wavelengths (nm)
CEx 1	GPON/25G	1290 - 1500
	UPG	1260-1280 & 1525-1650
CEx 2	GPON/25G	1290 - 1500
	XGS-PON UPG	1260 - 1280; 1575 - 1581 1525-1560 & 1596-1650
CEx 3	GPON/25G	1290 - 1500
	RF UPG	1550 - 1560 1260-1280 & 1525-1540 & 1575-1650
CEx 4	GPON/25G	1290 - 1500
	XGS-PON	1260 - 1280 & 1575 - 1581
	NG-PON2 UPG	1524-1544 & 1596-1603 1550-1560 & 1613-1650
CEx 5	PON (COMBI)	1260-1500nm & 1575-1581nm
	UPG	1525-1565nm & 1596-1650nm

## Block Diagram

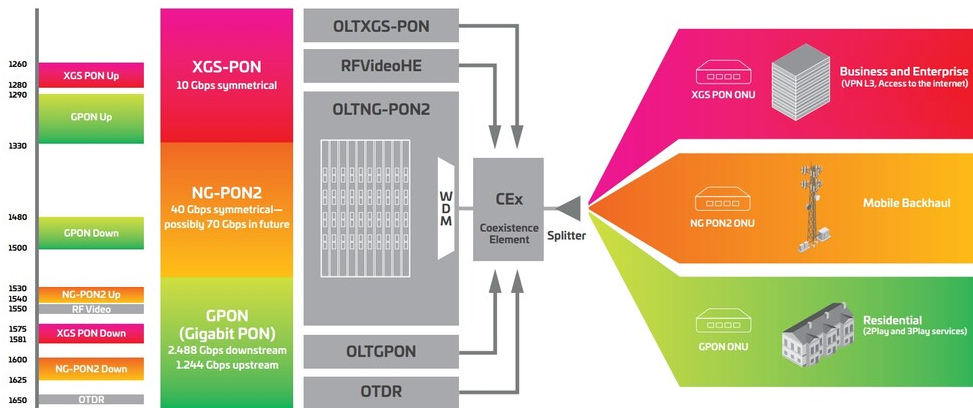

## Optical Specifications

<b>Directivity, minimum</b>	50 dB
<b>Input Power, maximum</b>	200 mW
<b>Passband</b>	GPON: 1290-1500 nm   UPG: 1525-1560 nm & 1596-1650 nm   XGS-PON: 1260-1280 nm & 1575-1581 nm
<b>Polarization Dependent Loss, maximum</b>	0.3 dB
<b>Polarization Mode Dispersion, maximum</b>	0.5 ps
<b>Insertion Loss, including connectors</b>	COM to GPON: ≤ 0.8 dB   COM to UPG: ≤ 1.2 dB   COM to XGS-PON: ≤ 1.2 dB

# LX1SXB06AAN

---

<b>Isolation</b>	COM to GPON: $\geq 30$ dB   COM to UPG: $\geq 15$ dB   COM to XGS-PON: $\geq 30$ dB
<b>Return Loss, minimum</b>	50 dB

## Environmental Specifications

<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Relative Humidity</b>	5%–95%, non-condensing
<b>Qualification Standards</b>	IEC 61300-2-1   Telcordia GR-1209-CORE

## Packaging and Weights

<b>Packaging quantity</b>	1
---------------------------	---