

CV5847-000 | FIST-FSASA3-SC-202-1P-S



FIST® Fiber Splice Tray with Field Installable Splitter, symmetrical ratio, 2x2, Low loss Planar, grade P

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand China EMEA India Latin America North America |
| Product Type | Splitter splice tray |
| Product Brand | FIST® |
| Product Series | FIST-FSASA3 |


General Specifications

| | |
|---------------------------|--|
| Functionality | Splitting |
| Technology Type | Planar lightwave circuit (PLC) |
| Application | For use with BUDI fiber wall boxes For use with FIST fiber splice closures |
| Distribution Type | 2 x 2 splitter |
| Interface, Input | Stub tail |
| Interface, Output | Stub tail |
| Split Ratio | Symmetrical |
| Splitter, quantity | 1 |

Dimensions

| | |
|---------------------------------|-------------------|
| Pigtail Diameter, Input | 0.25 mm 0.01 in |
| Pigtail Diameter, Output | 0.25 mm 0.01 in |

Representative Image

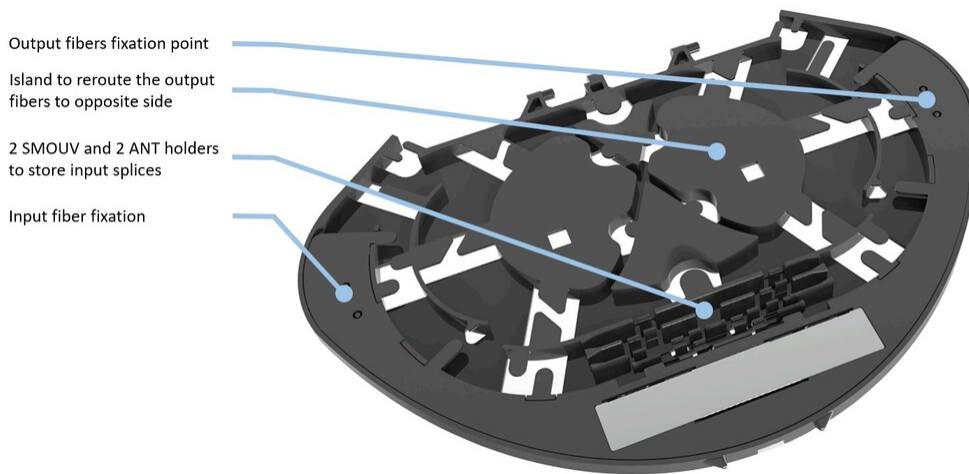

Optical Specifications

| | |
|---|-------------------------|
| Directivity, minimum | 55 dB |
| Performance Grade | Grade P (PLC, standard) |
| Polarization Dependent Loss, maximum | 0.3 dB |
| Uniformity, maximum | 1.2 dB |
| Wavelength Range | 1260–1650 nm |
| Insertion Loss, Splitter, maximum | 4.2 dB |
| Return Loss, Splitter, minimum | 55 dB |

Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|