
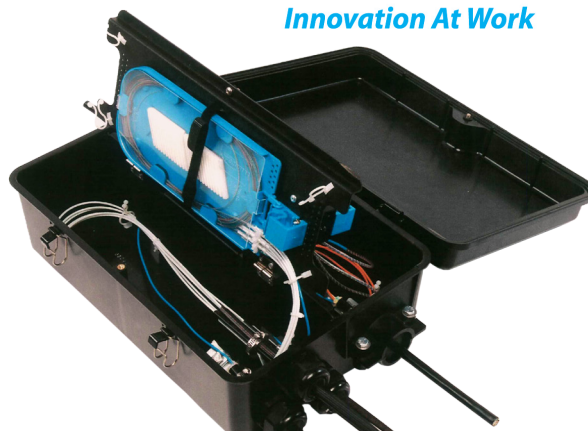


## Optical Terminal Enclosure (OTE)

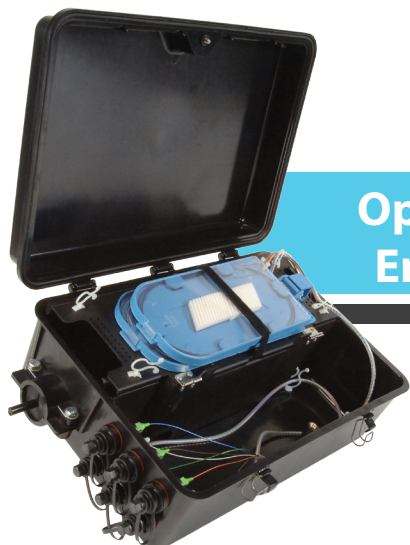

### Product Description

The OTE (Optical Terminal Enclosure) is designed to support the splicing and termination of optical drops and traditional splicing in aerial, pole or wall mount applications. The unit is an in-line enclosure with 3 models to choose from depending on the drop cable being used. The OTE is constructed of a durable and impact resistant polyethylene material specifically formulated for outside plant environments. The unit can support express cabling as well as the addition of branch or lateral cabling. When used as a drop splicing or termination enclosure, the OTE will support a variety of drop designs and provide the environmental sealing and strain relief required.

### General Specifications

<b>Dimensions:</b>	18.5" L x 6" D x 11.5" W
<b>Cable Entry:</b>	<u>10-6060</u> (8) total; (2) Express/Feeder, (6) Branch, Lateral, or Multiport* <u>020-026-20</u> (14) total (2) Express/Feeder (12) SC Outdoor Adaptors <u>020-066-10</u> (8) total; (2) Express/Feeder, (6) Branch, Lateral, or Multiport*
<b>Capacity:</b>	(4) 4048-SSTP Splice Trays (96) Single Splices OR (192) Ribbon Splices
<b>Express Dia:</b>	<b>Max</b> 1.124"   <b>Min</b> 0.375"
<b>Branch Dia:</b>	<b>Max</b> 0.98"   <b>Min</b> 0.30"
<b>Colors:</b>	Black Only
<b>Material:</b>	Polyethylene

Drop Seals or other cable seal kits, see ordering information

\*Multiport Cable Seals are available to support up to 36 fiber drops for FTTH Applications

### Contact Us

#### North America

Tel: +1 440 366 6966  
Fax: +1 440 366 6802

Email: [engsupport@gomultilink.com](mailto:engsupport@gomultilink.com)

#### Europe, Middle East & Africa


Tel: +1 440 366 6966  
Fax: +1 440 366 6802

Email: [engsupport@gomultilink.com](mailto:engsupport@gomultilink.com)

#### Latin & South America

Tel: +1 440 366 6966  
Fax: +1 440 366 6802

Email: [lasupport@gomultilink.com](mailto:lasupport@gomultilink.com)

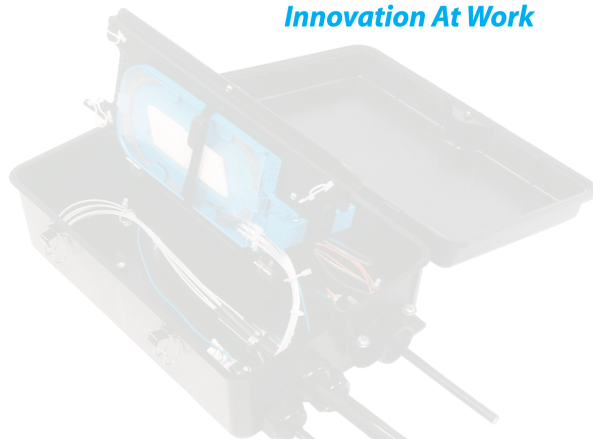

## Ordering Information

<u>Stock ID</u>	<u>Description</u>
10-6060	Starfighter OTE Basic Enclosure for use with 1" NPT fittings
020-026-20	Starfighter OTE with 6 SC outdoor connectors
020-066-10	Starfighter OTE with 8 SC/APC connectors
10-5122	1" NPT dome fitting includes insert for .71"-.98" diameter cable
10-6062	OTE Cable Addition Kit for branch or lateral cable additions, .3"-.98"
10-5134	Multiport insert (4 entries) Drop Entry Kit for Corning drop cable
10-5129	Multiport insert (6 entries) Drop Entry Kit for .265" Round drop cable
10-6002	Multiport insert (4 entries) for .35 diameter
10-5130	Multiport insert (4 entries) for .370 diameter
065-082-10	SC Outdoor Connector
10-5434	ADSS Mounting Bracket Kit
10-8007	4048-SSTP Splice Tray (24 single fiber splices)
10-5436	Aerial hanger bracket kit
10-5435	Wall / Pole mounting bracket



**NOTE:** Other multiport cable seal inserts are available; please contact Customer Service for more information or for specially equipped models

### North America

Tel: +1 440 366 6966  
Fax: +1 440 366 6802

### Europe, Middle East & Africa

Tel: +1 440 366 6966  
Fax: +1 440 366 6802

### Latin & South America

Tel: +1 440 366 6966  
Fax: +1 440 366 6802

### Contact Us

Email: [engsupport@gomultilink.com](mailto:engsupport@gomultilink.com)

Email: [engsupport@gomultilink.com](mailto:engsupport@gomultilink.com)

Email: [lasupport@gomultilink.com](mailto:lasupport@gomultilink.com)