


# Fiber Drop Gel Splice Kit

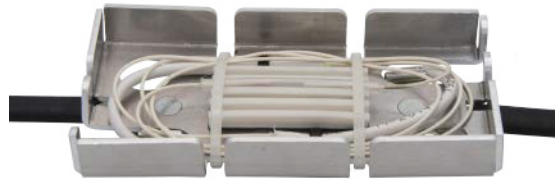

## Product Description

Introducing Multilink's 6 fiber splice enclosure. This product is intended to provide a splice enclosure for small diameter small count fiber optic cable. It has the capacity to splice up to 2 cables / 6 fibers. It accepts various cable types including; round, dielectric or armored, as well as flat drop with tone wire. This enclosure utilizes Multilink's revolutionary Gel Seal technology. This gel has been used for numerous years in direct buried applications with resounding success. Due to its small size as well as its ability to be used in butt or through splice configurations it works for most applications.

## Applications

Gel seal for fiber drop splicing

Direct Buried, Vault, Pedestal, Strand

## Features

Accepts round drop armored and non-armored, Flat drop dielectric and with tone wire

Has a fiber management bracket to secure fiber

Capable of splicing 1-6 900µm or 250µm fibers

Copyright © 2020 Multilink Inc. • All rights reserved • Specifications subject to change without notice • Rev. September 17, 2020

**Multilink**  
Simply More...



**YouTube**  
youtube.com/gomultilink

## General Specifications

<b>Dimensions:</b>	W4.25" x H2.5" x D1.5"
<b>Included:</b>	Fiber splice mounting bracket, tie downs, Multilinks Gel Seal, fiber splice chip
<b>Environmental Cycling:</b>	-40°C to 60°C; 3 cycles/day; 100 cycles
<b>Heat Aging:</b>	60°C; 30 days
<b>Water Immersion:</b>	Room temperature for 30 days; 2 foot water head
<b>Freeze-Thaw Cycling:</b>	-40°C to 60°C; 2 cycles per day; 1000 cycles
<b>Salt Fog:</b>	Per ASTM B-368; 30 days
<b>Soil Chemical Resistance:</b>	30 day immersion in: · 0.1N Na <sub>2</sub> SO <sub>4</sub> · 0.1N N <sub>2</sub> SO <sub>4</sub> · 0.1N NaCl · 0.1 NaOH
<b>Fungus Resistance:</b>	Per ASTM G-21

## Ordering

Fiber Drop Gel Splice Kit	
Multilink Part Number	Description
072-411-10	Fiber Drop Gel Splice Kit
072-411-30	Toneable Fiber Drop Gel Splice Kit

### Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

# Multilink®

Simply More...



Multilink Inc.  
 580 Ternes Ln  
 Elyria, OH 44035  
 Tel: (440) 366-6966  
 Fax: (440) 366-6802



[facebook.com/GoMultilink1](https://facebook.com/GoMultilink1)



[twitter.com/GoMultilink](https://twitter.com/GoMultilink)



[youtube.com/GoMultilink](https://youtube.com/GoMultilink)

© Multilink Inc. 2020 • All Rights Reserved

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:engsupport@gomultilink.com">engsupport@gomultilink.com</a>	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: <a href="mailto:lasupport@gomultilink.com">lasupport@gomultilink.com</a>

Contact Us