### FPCC-7KYP



# Fiber Optic Patch Cord, duplex, singlemode, 1.2 mm OFNP jacket, SC /UPC-LC/UPC, yellow

- 1.2 mm diameter cable provides a 65% space savings over commonly used 2.0 mm cable
- 1.2 mm diameter fiber patch cords use Reduced Bend Radius (RBR) fiber cable
- Typically used in environments where space constraints and cable routing prove most challenging
- \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

#### Product Classification

Regional Availability Europe | Latin America | Middle East/Africa | North America

**Product Type** Fiber patch cord, duplex

Product Series FPCC

**Government Requirements**Build America Buy America (BABA) compliant\*

### General Specifications

Connector A, quantity

 Color, boot A
 Blue

 Color, connector A
 Blue

 Connector B, quantity
 1

Color, boot BBlueColor, connector BBlue

Interface, Connector A LC/UPC
Interface, Connector B SC/UPC

Jacket Color Yellow

**Location of Manufacturing**Claremont, North Carolina

Total Fibers, quantity 2

**Transmission Standards** TIA/EIA-604 FOCIS-3


**Dimensions** 

**Diameter Over Jacket** 1.2 mm | 0.047 in

**COMMSCOPE®** 

## FPCC-7KYP

### Ordering Tree

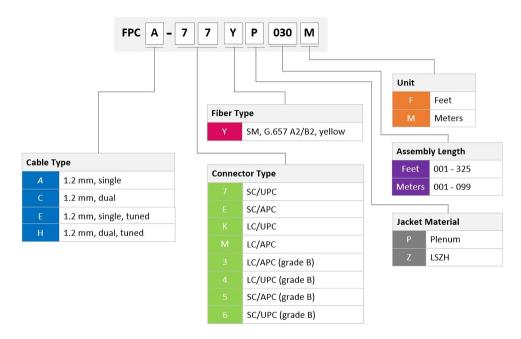

### **Optical Specifications**

Fiber Mode	Singlemode
Fiber Type	G.657.A2/B2
Insertion Loss, maximum, connector A	0.3 dB
Insertion Loss, maximum, connector B	0.2 dB
Return Loss, minimum, connector A	55 dB
Return Loss, minimum, connector B	55 dB

### **Environmental Specifications**

Environmental Space Plenum

**Qualification Standards** GR-326 CORE | GR-449-CORE

Packaging and Weights

Packaging quantity

